

Shenzhen Yofolon Electronic Co., LTD

DC Blower Fan Specification List


[illegible]



SPECIFICATIONS:50x50x15mm Blower

Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DB5015S05H	S	5	3.5~5.5	0.30	1.50	4500	4.35	9.15	37.32	25
DB5015S05M	S	5	3.5~5.5	0.23	1.15	4000	3.62	7.32	33.45	
DB5015S05L	S	5	3.5~5.5	0.17	0.85	3500	3.05	5.50	30.24	
DB5015B05H	B	5	3.5~5.5	0.30	1.50	4500	4.35	9.15	37.32	
DB5015B05M	B	5	3.5~5.5	0.23	1.15	4000	3.62	7.32	33.45	
DB5015B05L	B	5	3.5~5.5	0.17	0.85	3500	3.05	5.50	30.24	
DB5015S12H	S	12	7.0~13.8	0.16	1.92	4500	4.35	9.15	37.32	
DB5015S12M	S	12	7.0~13.8	0.12	1.44	4000	3.62	7.32	33.45	
DB5015S12L	S	12	7.0~13.8	0.08	0.96	3500	3.05	5.50	30.24	
DB5015B12H	B	12	7.0~13.8	0.16	1.92	4500	4.35	9.15	37.32	
DB5015B12M	B	12	7.0~13.8	0.12	1.44	4000	3.62	7.32	33.45	
DB5015B12L	B	12	7.0~13.8	0.08	0.96	3500	3.05	5.50	30.24	

Notes: Specificatiions subject to change without notice!

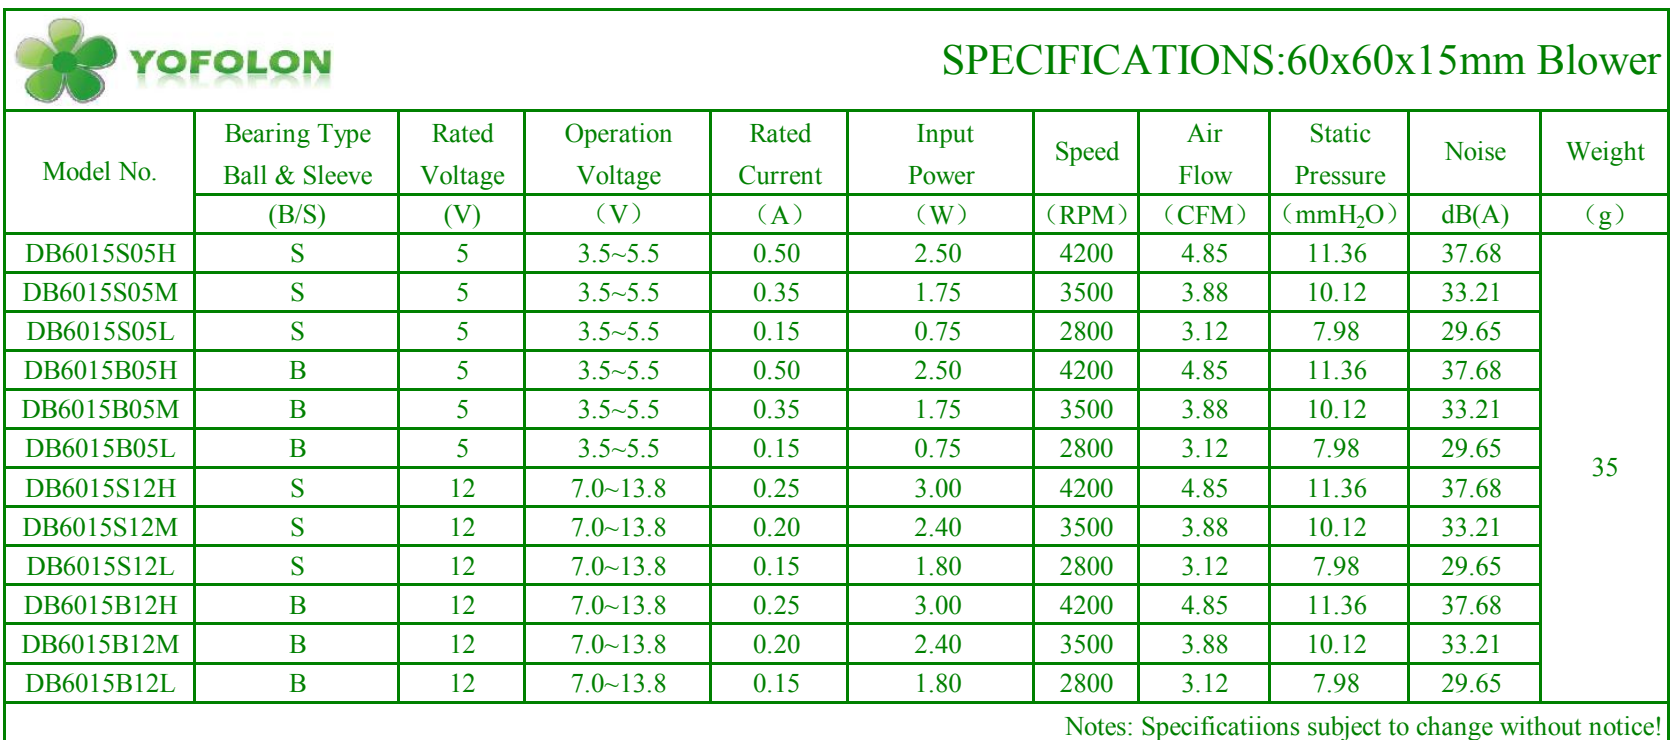



SPECIFICATIONS:75x75x30mm Blower

Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DB7530S12H	S	12	7.0~13.8	0.25	3.00	3000	10.55	9.82	37.24	69
DB7530S12M	S	12	7.0~13.8	0.17	2.04	2500	8.86	6.65	34.36	
DB7530S12L	S	12	7.0~13.8	0.12	1.44	2000	7.15	3.92	30.57	
DB7530B12H	B	12	7.0~13.8	0.25	3.00	3000	10.55	9.82	37.24	
DB7530B12M	B	12	7.0~13.8	0.17	2.04	2500	8.86	6.65	34.36	
DB7530B12L	B	12	7.0~13.8	0.12	1.44	2000	7.15	3.92	30.57	
DB7530S24H	S	24	14.0~27.6	0.18	4.32	3000	10.55	9.82	37.24	
DB7530S24M	S	24	14.0~27.6	0.14	3.36	2500	8.86	6.65	34.36	
DB7530S24L	S	24	14.0~27.6	0.10	2.40	2000	7.15	3.92	30.57	
DB7530B24H	B	24	14.0~27.6	0.18	4.32	3000	10.55	9.82	37.24	
DB7530B24M	B	24	14.0~27.6	0.14	3.36	2500	8.86	6.65	34.36	
DB7530B24L	B	24	14.0~27.6	0.10	2.40	2000	7.15	3.92	30.57	

Notes: Specificatiions subject to change without notice!



SPECIFICATIONS:97x97x33mm Blower

Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DB9733S12H	S	12	7.0~13.8	0.60	7.20	3500	25.65	23.35	49.32	164
DB9733S12M	S	12	7.0~13.8	0.40	4.80	3000	23.10	20.86	43.67	
DB9733S12L	S	12	7.0~13.8	0.20	2.40	2500	20.05	16.42	36.25	
DB9733B12H	B	12	7.0~13.8	0.60	7.20	3500	25.65	23.35	49.32	
DB9733B12M	B	12	7.0~13.8	0.40	4.80	3000	23.10	20.86	43.67	
DB9733B12L	B	12	7.0~13.8	0.20	2.40	2500	20.05	16.42	36.25	
DB9733S24H	S	24	14.0~27.6	0.40	9.60	3500	25.65	23.35	49.32	
DB9733S24M	S	24	14.0~27.6	0.25	6.00	3000	23.10	20.86	43.67	
DB9733S24L	S	24	14.0~27.6	0.15	3.60	2500	20.05	16.42	36.25	
DB9733B24H	B	24	14.0~27.6	0.40	9.60	3500	25.65	23.35	49.32	
DB9733B24M	B	24	14.0~27.6	0.25	6.00	3000	23.10	20.86	43.67	
DB9733B24L	B	24	14.0~27.6	0.15	3.60	2500	20.05	16.42	36.25	

Notes: Specificatiions subject to change without notice!



Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DB1232S12H	S	12	7.0~13.8	0.70	8.40	2500	36.56	30.26	45.68	198
DB1232S12M	S	12	7.0~13.8	0.50	6.00	2200	32.15	25.10	41.25	
DB1232S12L	S	12	7.0~13.8	0.40	4.80	1800	28.89	17.85	37.86	
DB1232B12H	B	12	7.0~13.8	0.70	8.40	2500	36.56	30.26	45.68	
DB1232B12M	B	12	7.0~13.8	0.50	6.00	2200	32.15	25.10	41.25	
DB1232B12L	B	12	7.0~13.8	0.40	4.80	1800	28.89	17.85	37.86	
DB1232S24H	S	24	14.0~27.6	0.40	9.60	2500	36.56	30.26	45.68	
DB1232S24M	S	24	14.0~27.6	0.30	7.20	2200	32.15	25.10	41.25	
DB1232S24L	S	24	14.0~27.6	0.20	4.80	1800	28.89	17.85	37.86	
DB1232B24H	B	24	14.0~27.6	0.40	9.60	2500	36.56	30.26	45.68	
DB1232B24M	B	24	14.0~27.6	0.30	7.20	2200	32.15	25.10	41.25	
DB1232B24L	B	24	14.0~27.6	0.20	4.80	1800	28.89	17.85	37.86	
Notes: Specificatiions subject to change without notice!										