


Shenzhen Yofolon Electronic Co., LTD

DC Series Fan Specification List

			SPECIFICATIONS: 20x20x10mm FAN							
Model No.	Bearing Type	Rated	Operation	Rated	Input	Speed	Air	Static	Noise	Weight
	Ball & Sleeve	Voltage	Voltage	Current	Power		Flow	Pressure		
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC2010S05H	S	5	3.5~5.5	0.20	1.00	18000	1.89	7.23	37.28	5.5
DC2010S05M	S	5	3.5~5.5	0.15	0.75	12000	1.28	3.93	27.13	
DC2010S05L	S	5	3.5~5.5	0.10	0.50	10000	0.95	2.38	21.55	
DC2010S12H	S	12	7.0~13.8	0.15	1.80	18000	1.89	7.23	37.28	
DC2010S12M	S	12	7.0~13.8	0.10	1.20	12000	1.28	3.93	27.13	
DC2010S12L	S	12	7.0~13.8	0.07	0.84	10000	0.95	2.38	21.55	
Notes: Specificatiions subject to change without notice!										



SPECIFICATIONS:25x25x10mm FAN

Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC2510S05H	S	5	3.5~5.5	0.20	1.00	13000	2.95	6.98	30.56	6.5
DC2510S05M	S	5	3.5~5.5	0.16	0.80	10000	2.25	5.12	24.15	
DC2510S05L	S	5	3.5~5.5	0.14	0.70	8000	1.65	2.54	19.35	
DC2510B05H	B	5	3.5~5.5	0.20	1.00	13000	2.95	6.98	30.56	
DC2510B05M	B	5	3.5~5.5	0.16	0.80	10000	2.25	5.12	24.15	
DC2510B05L	B	5	3.5~5.5	0.14	0.70	8000	1.65	2.54	19.35	
DC2510S12H	S	12	7.0~13.8	0.12	1.44	13000	2.95	6.98	30.56	
DC2510S12M	S	12	7.0~13.8	0.10	1.20	10000	2.25	5.12	24.15	
DC2510S12L	S	12	7.0~13.8	0.08	0.96	8000	1.65	2.54	19.35	
DC2510B12H	B	12	7.0~13.8	0.12	1.44	13000	2.95	6.98	30.56	
DC2510B12M	B	12	7.0~13.8	0.10	1.20	10000	2.25	5.12	24.15	
DC2510B12L	B	12	7.0~13.8	0.08	0.96	8000	1.65	2.54	19.35	

Notes: Specifications subject to change without notice!



Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC3010S05H	S	5	3.5~5.5	0.20	1.00	10000	4.32	4.45	29.86	8.0
DC3010S05M	S	5	3.5~5.5	0.15	0.75	8000	3.56	3.65	24.25	
DC3010S05L	S	5	3.5~5.5	0.10	0.50	6000	2.65	2.62	21.47	
DC3010B05H	B	5	3.5~5.5	0.20	1.00	10000	4.32	4.45	29.86	
DC3010B05M	B	5	3.5~5.5	0.15	0.75	8000	3.56	3.65	24.25	
DC3010B05L	B	5	3.5~5.5	0.10	0.50	6000	2.65	2.62	21.47	
DC3010S12H	S	12	7.0~13.8	0.12	1.44	10000	4.32	4.45	29.86	
DC3010S12M	S	12	7.0~13.8	0.10	1.20	8000	3.56	3.65	24.25	
DC3010S12L	S	12	7.0~13.8	0.08	0.96	6000	2.65	2.62	21.47	
DC3010B12H	B	12	7.0~13.8	0.12	1.44	10000	4.32	4.45	29.86	
DC3010B12M	B	12	7.0~13.8	0.10	1.20	8000	3.56	3.65	24.25	
DC3010B12L	B	12	7.0~13.8	0.08	0.96	6000	2.65	2.62	21.47	
Notes: Specificatiions subject to change without notice!										



SPECIFICATIONS:35x35x10mm FAN

Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC3510S05H	S	5	3.5~5.5	0.25	1.25	9000	6.56	3.75	31.86	9.5
DC3510S05M	S	5	3.5~5.5	0.22	1.10	7000	5.15	2.55	26.54	
DC3510S05L	S	5	3.5~5.5	0.14	0.70	5000	3.62	1.34	20.25	
DC3510B05H	B	5	3.5~5.5	0.25	1.25	9000	6.56	3.75	31.86	
DC3510B05M	B	5	3.5~5.5	0.22	1.10	7000	5.15	2.55	26.54	
DC3510B05L	B	5	3.5~5.5	0.14	0.70	5000	3.62	1.34	20.25	
DC3510S12H	S	12	7.0~13.8	0.15	1.80	9000	6.56	3.75	31.86	
DC3510S12M	S	12	7.0~13.8	0.12	1.44	7000	5.15	2.55	26.54	
DC3510S12L	S	12	7.0~13.8	0.09	1.08	5000	3.62	1.34	20.25	
DC3510B12H	B	12	7.0~13.8	0.15	1.80	9000	6.56	3.75	31.86	
DC3510B12M	B	12	7.0~13.8	0.12	1.44	7000	5.15	2.55	26.54	
DC3510B12L	B	12	7.0~13.8	0.09	1.08	5000	3.62	1.34	20.25	

Notes: Specifications subject to change without notice!



SPECIFICATIONS:40x40x10mm FAN

Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC4010S05H	S	5	3.5~5.5	0.25	1.25	8000	8.25	3.82	33.25	17
DC4010S05M	S	5	3.5~5.5	0.22	1.10	6500	6.52	3.35	28.17	
DC4010S05L	S	5	3.5~5.5	0.18	0.90	5000	5.54	2.84	23.87	
DC4010B05H	B	5	3.5~5.5	0.25	1.25	8000	8.25	3.82	33.25	
DC4010B05M	B	5	3.5~5.5	0.22	1.10	6500	6.52	3.35	28.17	
DC4010B05L	B	5	3.5~5.5	0.18	0.90	5000	5.54	2.84	23.87	
DC4010S12H	S	12	7.0~13.8	0.15	1.80	8000	8.25	3.82	33.25	
DC4010S12M	S	12	7.0~13.8	0.12	1.44	6500	6.52	3.35	28.17	
DC4010S12L	S	12	7.0~13.8	0.10	1.20	5000	5.54	2.84	23.87	
DC4010B12H	B	12	7.0~13.8	0.15	1.80	8000	8.25	3.82	33.25	
DC4010B12M	B	12	7.0~13.8	0.12	1.44	6500	6.52	3.35	28.17	
DC4010B12L	B	12	7.0~13.8	0.10	1.20	5000	5.54	2.84	23.87	
DC4010S24H	S	24	14.0~27.6	0.08	1.92	8000	8.25	3.82	33.25	
DC4010S24M	S	24	14.0~27.6	0.06	1.44	6500	6.52	3.35	28.17	
DC4010S24L	S	24	14.0~27.6	0.04	0.96	5000	5.54	2.84	23.87	
DC4010B24H	B	24	14.0~27.6	0.08	1.92	8000	8.25	3.82	33.25	
DC4010B24M	B	24	14.0~27.6	0.06	1.44	6500	6.52	3.35	28.17	
DC4010B24L	B	24	14.0~27.6	0.04	0.96	5000	5.54	2.84	23.87	

Notes: Specifications subject to change without notice!



Model No.	Bearing Type	Rated	Operation	Rated	Input	Speed	Air	Static	Noise	Weight
	Ball & Sleeve	Voltage	Voltage	Current	Power		Flow	Pressure		
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC4020S05H	S	5	3.5~5.5	0.28	1.40	8000	8.65	5.85	33.65	24
DC4020S05M	S	5	3.5~5.5	0.20	1.00	6500	7.15	4.12	29.56	
DC4020S05L	S	5	3.5~5.5	0.15	0.75	5000	5.56	2.52	23.74	
DC4020B05H	B	5	3.5~5.5	0.28	1.40	8000	8.65	5.85	33.65	
DC4020B05M	B	5	3.5~5.5	0.20	1.00	6500	7.15	4.12	29.56	
DC4020B05L	B	5	3.5~5.5	0.15	0.75	5000	5.56	2.52	23.74	
DC4020S12H	S	12	7.0~13.8	0.15	1.80	8000	8.65	5.85	33.65	
DC4020S12M	S	12	7.0~13.8	0.12	1.44	6500	7.15	4.12	29.56	
DC4020S12L	S	12	7.0~13.8	0.07	0.84	5000	5.56	2.52	23.74	
DC4020B12H	B	12	7.0~13.8	0.15	1.80	8000	8.65	5.85	33.65	
DC4020B12M	B	12	7.0~13.8	0.12	1.44	6500	7.15	4.12	29.56	
DC4020B12L	B	12	7.0~13.8	0.07	0.84	5000	5.56	2.52	23.74	
DC4020S24H	S	24	14.0~27.6	0.10	2.40	8000	8.65	5.85	33.65	
DC4020S24M	S	24	14.0~27.6	0.07	1.68	6500	7.15	4.12	29.56	
DC4020S24L	S	24	14.0~27.6	0.05	1.20	5000	5.56	2.52	23.74	
DC4020B24H	B	24	14.0~27.6	0.10	2.40	8000	8.65	5.85	33.65	
DC4020B24M	B	24	14.0~27.6	0.07	1.68	6500	7.15	4.12	29.56	
DC4020B24L	B	24	14.0~27.6	0.05	1.20	5000	5.56	2.52	23.74	
Notes: Specificatiions subject to change without notice!										



SPECIFICATIONS:40x40x28mm FAN

Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC4028S12H	S	12	7.0~13.8	0.18	2.16	8000	10.25	8.32	38.56	36
DC4028S12M	S	12	7.0~13.8	0.15	1.80	6500	8.45	5.65	32.57	
DC4028S12L	S	12	7.0~13.8	0.12	1.44	5000	6.42	3.25	25.35	
DC4028B12H	B	12	7.0~13.8	0.18	2.16	8000	10.25	8.32	38.56	
DC4028B12M	B	12	7.0~13.8	0.15	1.80	6500	8.45	5.65	32.57	
DC4028B12L	B	12	7.0~13.8	0.12	1.44	5000	6.42	3.25	25.35	
DC4028S24H	S	24	14.0~27.6	0.12	2.88	8000	10.25	8.32	38.56	
DC4028S24M	S	24	14.0~27.6	0.08	1.92	6500	8.45	5.65	32.57	
DC4028S24L	S	24	14.0~27.6	0.05	1.20	5000	6.42	3.25	25.35	
DC4028B24H	B	24	14.0~27.6	0.12	2.88	8000	10.25	8.32	38.56	
DC4028B24M	B	24	14.0~27.6	0.08	1.92	6500	8.45	5.65	32.57	
DC4028B24L	B	24	14.0~27.6	0.05	1.20	5000	6.42	3.25	25.35	

Notes: Specificatiions subject to change without notice!



SPECIFICATIONS:45x45x10mm FAN

Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC4510S05H	S	5	3.5~5.5	0.22	1.10	6500	7.56	3.46	33.25	18
DC4510S05M	S	5	3.5~5.5	0.16	0.80	5000	5.85	2.45	27.86	
DC4510S05L	S	5	3.5~5.5	0.12	0.60	4000	4.55	1.61	22.54	
DC4510B05H	B	5	3.5~5.5	0.22	1.10	6500	7.56	3.46	33.25	
DC4510B05M	B	5	3.5~5.5	0.16	0.80	5000	5.85	2.45	27.86	
DC4510B05L	B	5	3.5~5.5	0.12	0.60	4000	4.55	1.61	22.54	
DC4510S12H	S	12	7.0~13.8	0.12	1.10	6500	7.56	3.46	33.25	
DC4510S12M	S	12	7.0~13.8	0.10	0.80	5000	5.85	2.45	27.86	
DC4510S12L	S	12	7.0~13.8	0.08	0.60	4000	4.55	1.61	22.54	
DC4510B12H	B	12	7.0~13.8	0.12	1.10	6500	7.56	3.46	33.25	
DC4510B12M	B	12	7.0~13.8	0.10	0.80	5000	5.85	2.45	27.86	
DC4510B12L	B	12	7.0~13.8	0.08	0.60	4000	4.55	1.61	22.54	

Notes: Specificatiions subject to change without notice!




Notes: Specifications subject to change without notice!

Notes: Specifications subject to change without notice!



Notes: Specifications subject to change without notice!


Notes: Specifications subject to change without notice!

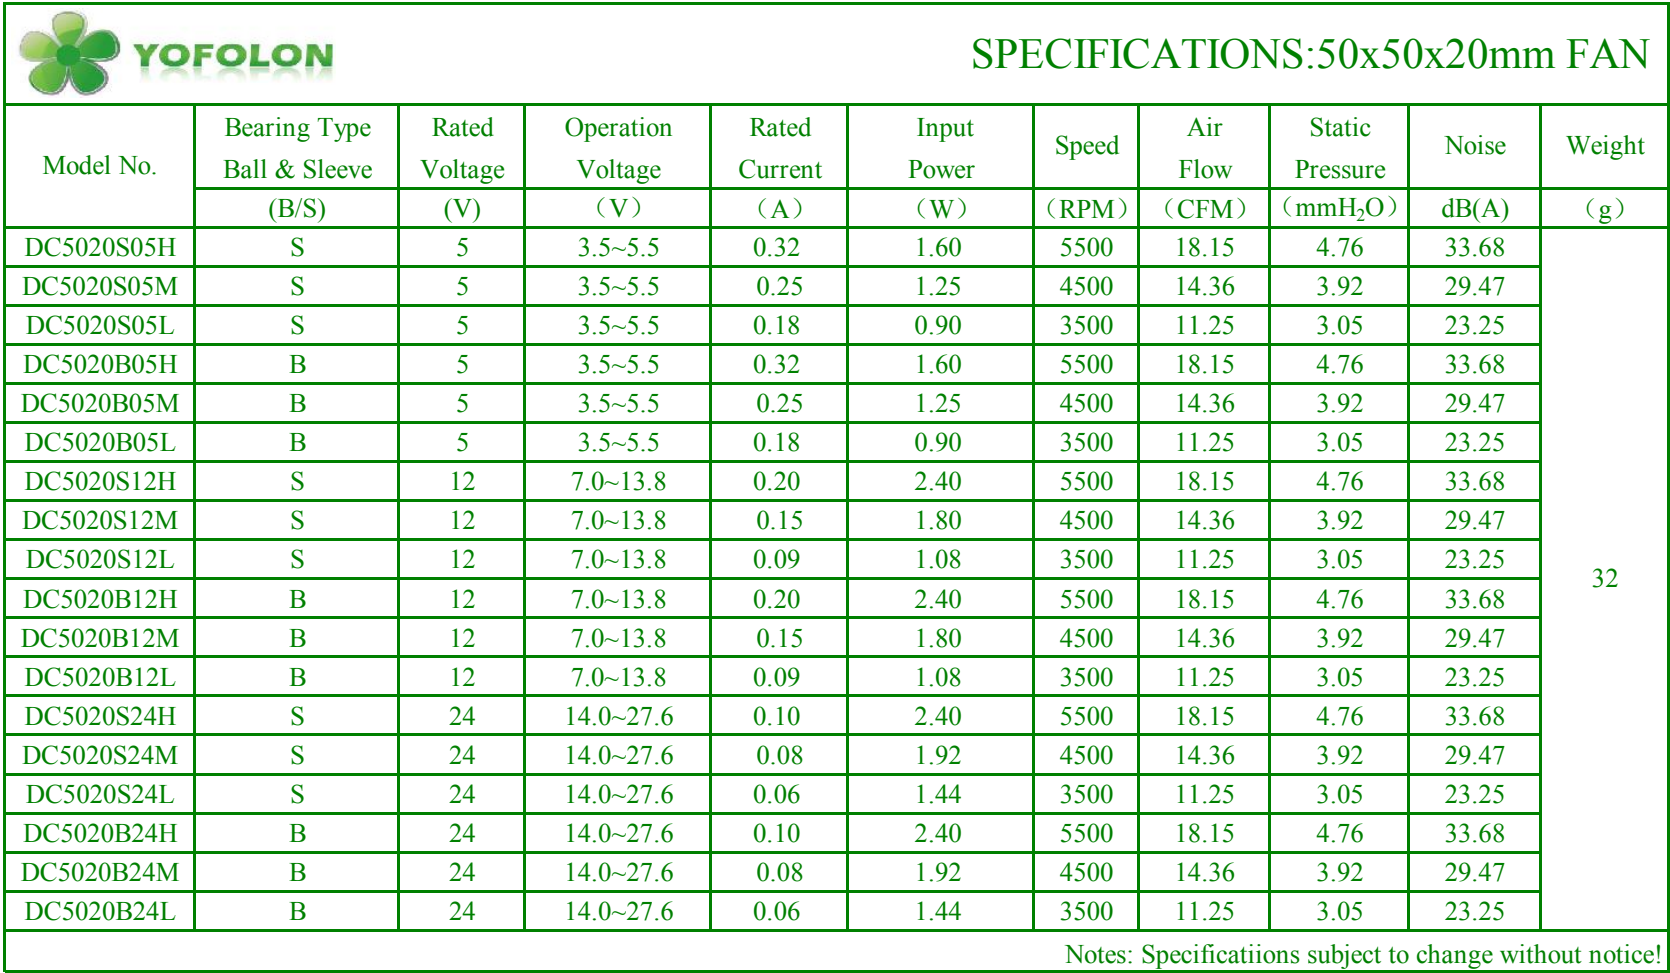



Notes: Specifications subject to change without notice!

Notes: Specifications subject to change without notice!

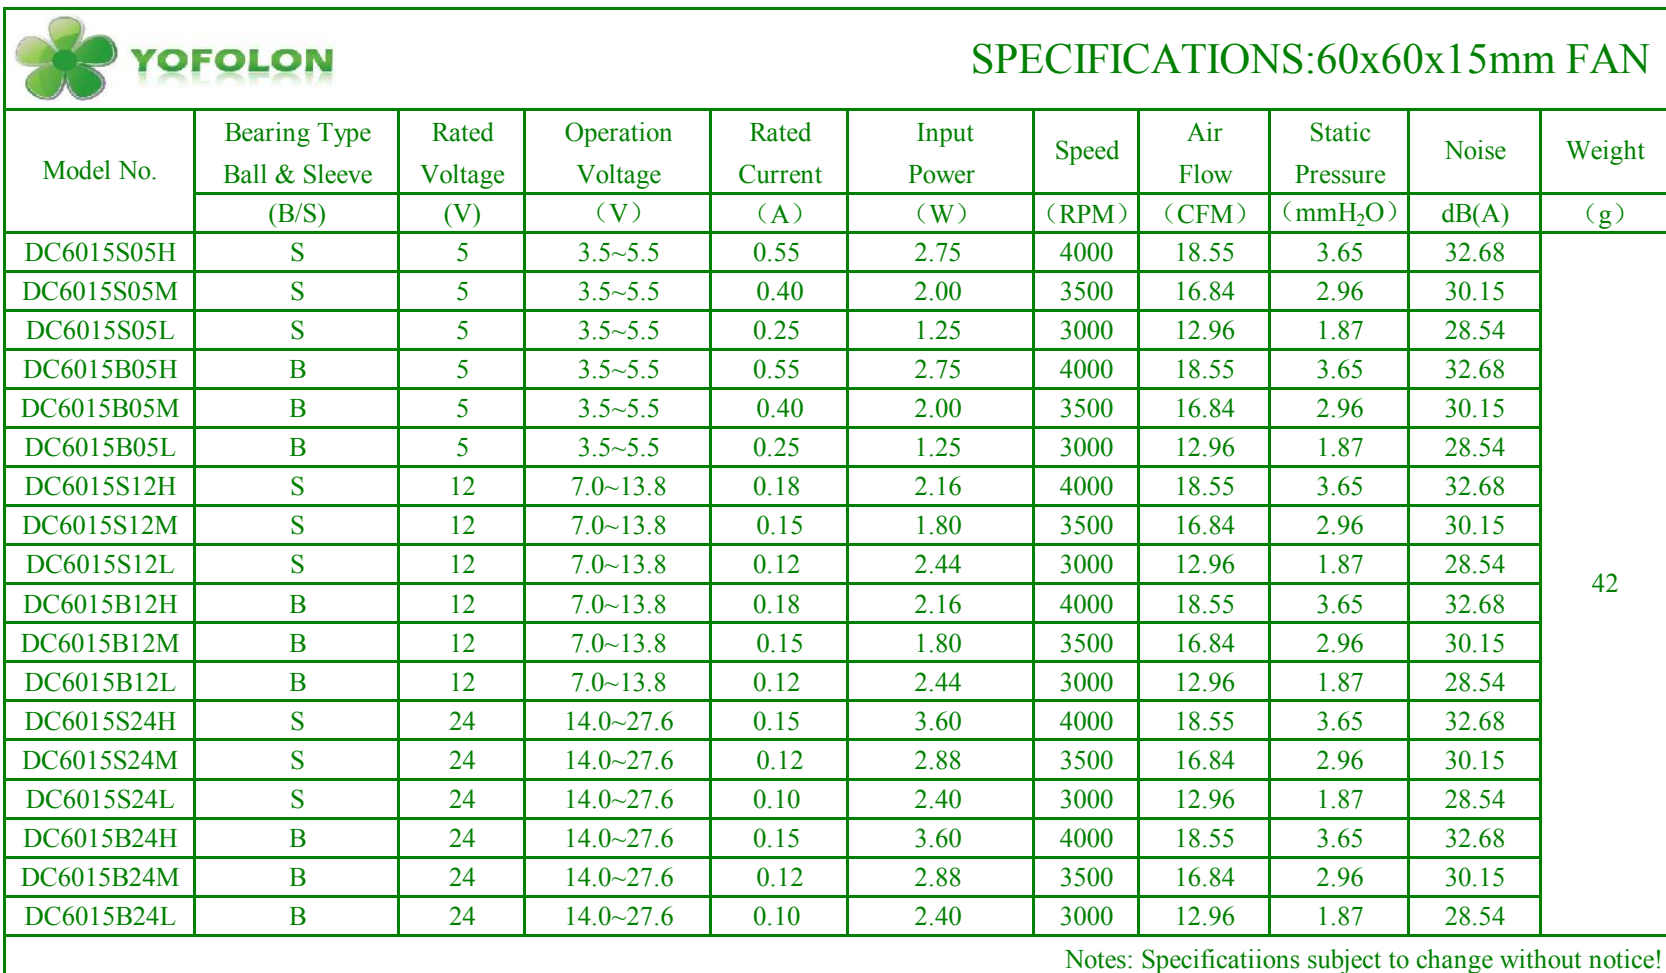



Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC6020S12H	S	12	7.0~13.8	0.16	1.92	4000	19.15	3.78	30.32	52
DC6020S12M	S	12	7.0~13.8	0.12	1.44	3500	16.98	2.98	25.65	
DC6020S12L	S	12	7.0~13.8	0.10	1.20	3000	13.54	1.96	23.68	
DC6020B12H	B	12	7.0~13.8	0.16	1.92	4000	19.15	3.78	30.32	
DC6020B12M	B	12	7.0~13.8	0.12	1.44	3500	16.98	2.98	25.65	
DC6020B12L	B	12	7.0~13.8	0.10	1.20	3000	13.54	1.96	23.68	
DC6020S24H	S	24	14.0~27.6	0.12	2.88	4000	19.15	3.78	30.32	
DC6020S24M	S	24	14.0~27.6	0.10	2.40	3500	16.98	2.98	25.65	
DC6020S24L	S	24	14.0~27.6	0.08	1.92	3000	13.54	1.96	23.68	
DC6020B24H	B	24	14.0~27.6	0.12	2.88	4000	19.15	3.78	30.32	
DC6020B24M	B	24	14.0~27.6	0.10	2.40	3500	16.98	2.98	25.65	
DC6020B24L	B	24	14.0~27.6	0.08	1.92	3000	13.54	1.96	23.68	
Notes: Specificatiions subject to change without notice!										



Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC6025S12H	S	12	7.0~13.8	0.18	2.16	4000	20.24	4.32	31.52	56
DC6025S12M	S	12	7.0~13.8	0.10	1.20	3000	14.87	2.17	27.24	
DC6025S12L	S	12	7.0~13.8	0.08	0.96	2500	13.15	1.75	21.68	
DC6025B12H	B	12	7.0~13.8	0.18	2.16	4000	20.24	4.32	31.52	
DC6025B12M	B	12	7.0~13.8	0.10	1.20	3000	14.87	2.17	27.24	
DC6025B12L	B	12	7.0~13.8	0.08	0.96	2500	13.15	1.75	21.68	
DC6025S24H	S	24	14.0~27.6	0.13	3.12	4000	20.24	4.32	31.52	
DC6025S24M	S	24	14.0~27.6	0.10	2.40	3000	14.87	2.17	27.24	
DC6025S24L	S	24	14.0~27.6	0.08	1.92	2500	13.15	1.75	21.68	
DC6025B24H	B	24	14.0~27.6	0.13	3.12	4000	20.24	4.32	31.52	
DC6025B24M	B	24	14.0~27.6	0.10	2.40	3000	14.87	2.17	27.24	
DC6025B24L	B	24	14.0~27.6	0.08	1.92	2500	13.15	1.75	21.68	
Notes: Specificatiions subject to change without notice!										



Notes: Specifications subject to change without notice!

Notes: Specifications subject to change without notice!



SPECIFICATIONS: 70x70x15mm FAN

Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC7015S12H	S	12	7.0~13.8	0.30	3.60	4000	34.12	4.03	34.27	48
DC7015S12M	S	12	7.0~13.8	0.25	3.00	3500	28.48	3.52	31.36	
DC7015S12L	S	12	7.0~13.8	0.20	2.40	3000	23.95	2.62	27.45	
DC7015B12H	B	12	7.0~13.8	0.30	3.60	4000	34.12	4.03	34.27	
DC7015B12M	B	12	7.0~13.8	0.25	3.00	3500	28.48	3.52	31.36	
DC7015B12L	B	12	7.0~13.8	0.20	2.40	3000	23.95	2.62	27.45	
DC7015S24H	S	24	14.0~27.6	0.15	3.60	4000	34.12	4.03	34.27	
DC7015S24M	S	24	14.0~27.6	0.11	2.64	3500	28.48	3.52	31.36	
DC7015S24L	S	24	14.0~27.6	0.08	1.92	3000	23.95	2.62	27.45	
DC7015B24H	B	24	14.0~27.6	0.15	3.60	4000	34.12	4.03	34.27	
DC7015B24M	B	24	14.0~27.6	0.11	2.64	3500	28.48	3.52	31.36	
DC7015B24L	B	24	14.0~27.6	0.08	1.92	3000	23.95	2.62	27.45	

Notes: Specifications subject to change without notice!



Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC7025S12H	S	12	7.0~13.8	0.32	3.84	4000	40.25	5.85	37.25	63
DC7025S12M	S	12	7.0~13.8	0.26	3.12	3500	31.34	4.17	32.67	
DC7025S12L	S	12	7.0~13.8	0.20	2.40	3000	24.16	3.15	28.36	
DC7025B12H	B	12	7.0~13.8	0.32	3.84	4000	40.25	5.85	37.25	
DC7025B12M	B	12	7.0~13.8	0.26	3.12	3500	31.34	4.17	32.67	
DC7025B12L	B	12	7.0~13.8	0.20	2.40	3000	24.16	3.15	28.36	
DC7025S24H	S	24	14.0~27.6	0.16	3.84	4000	40.25	5.85	37.25	
DC7025S24M	S	24	14.0~27.6	0.12	2.88	3500	31.34	4.17	32.67	
DC7025S24L	S	24	14.0~27.6	0.08	1.92	3000	24.16	3.15	28.36	
DC7025B24H	B	24	14.0~27.6	0.16	3.84	4000	40.25	5.85	37.25	
DC7025B24M	B	24	14.0~27.6	0.12	2.88	3500	31.34	4.17	32.67	
DC7025B24L	B	24	14.0~27.6	0.08	1.92	3000	24.16	3.15	28.36	

Notes: Specificatiions subject to change without notice!



Notes: Specifications subject to change without notice!

Notes: Specifications subject to change without notice!



SPECIFICATIONS:80x80x15mm FAN

Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC8015S12H	S	12	7.0~13.8	0.20	2.40	3000	30.15	2.35	34.65	54
DC8015S12M	S	12	7.0~13.8	0.15	1.80	2500	24.56	1.68	30.17	
DC8015S12L	S	12	7.0~13.8	0.10	1.20	2000	18.65	1.05	25.42	
DC8015B12H	B	12	7.0~13.8	0.20	2.40	3000	30.15	2.35	34.65	
DC8015B12M	B	12	7.0~13.8	0.15	1.80	2500	24.56	1.68	30.17	
DC8015B12L	B	12	7.0~13.8	0.10	1.20	2000	18.65	1.05	25.42	
DC8015S24H	S	24	14.0~27.6	0.11	2.64	3000	30.15	2.35	34.65	
DC8015S24M	S	24	14.0~27.6	0.08	1.92	2500	24.56	1.68	30.17	
DC8015S24L	S	24	14.0~27.6	0.05	1.20	2000	18.65	1.05	25.42	
DC8015B24H	B	24	14.0~27.6	0.11	2.64	3000	30.15	2.35	34.65	
DC8015B24M	B	24	14.0~27.6	0.08	1.92	2500	24.56	1.68	30.17	
DC8015B24L	B	24	14.0~27.6	0.05	1.20	2000	18.65	1.05	25.42	

Notes: Specificatiions subject to change without notice!



Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC8020S12H	S	12	7.0~13.8	0.20	2.40	3200	33.85	3.26	31.56	63
DC8020S12M	S	12	7.0~13.8	0.15	1.80	2700	28.56	2.42	27.78	
DC8020S12L	S	12	7.0~13.8	0.10	1.20	2200	24.32	1.64	24.34	
DC8020B12H	B	12	7.0~13.8	0.20	2.40	3200	33.85	3.26	31.56	
DC8020B12M	B	12	7.0~13.8	0.15	1.80	2700	28.56	2.42	27.78	
DC8020B12L	B	12	7.0~13.8	0.10	1.20	2200	24.32	1.64	24.34	
DC8020S24H	S	24	14.0~27.6	0.12	2.88	3200	33.85	3.26	31.56	
DC8020S24M	S	24	14.0~27.6	0.09	2.16	2700	28.56	2.42	27.78	
DC8020S24L	S	24	14.0~27.6	0.07	1.68	2200	24.32	1.64	24.34	
DC8020B24H	B	24	14.0~27.6	0.12	2.88	3200	33.85	3.26	31.56	
DC8020B24M	B	24	14.0~27.6	0.09	2.16	2700	28.56	2.42	27.78	
DC8020B24L	B	24	14.0~27.6	0.07	1.68	2200	24.32	1.68	24.34	
Notes: Specificatiions subject to change without notice!										



SPECIFICATIONS:80x80x25mm FAN

Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC8025S12H	S	12	7.0~13.8	0.20	2.40	3000	38.25	3.54	32.35	76
DC8025S12M	S	12	7.0~13.8	0.15	1.80	2500	31.17	2.56	27.24	
DC8025S12L	S	12	7.0~13.8	0.10	1.20	2000	25.25	1.72	22.86	
DC8025B12H	B	12	7.0~13.8	0.20	2.40	3000	38.25	3.54	32.35	
DC8025B12M	B	12	7.0~13.8	0.15	1.80	2500	31.17	2.56	27.24	
DC8025B12L	B	12	7.0~13.8	0.10	1.20	2000	25.25	1.72	22.86	
DC8025S24H	S	24	14.0~27.6	0.15	3.60	3000	38.25	3.54	32.35	
DC8025S24M	S	24	14.0~27.6	0.12	2.88	2500	31.17	2.56	27.24	
DC8025S24L	S	24	14.0~27.6	0.09	2.16	2000	25.32	1.72	22.86	
DC8025B24H	B	24	14.0~27.6	0.15	3.60	3000	38.25	3.54	32.35	
DC8025B24M	B	24	14.0~27.6	0.12	2.88	2500	31.17	2.56	27.24	
DC8025B24L	B	24	14.0~27.6	0.09	2.16	2000	25.25	1.72	22.86	

Notes: Specificatiions subject to change without notice!



SPECIFICATIONS:80x80x38mm FAN

Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC8038S12H	S	12	7.0~13.8	1.60	19.20	7000	98.45	26.56	61.25	153
DC8038S12M	S	12	7.0~13.8	0.90	10.80	6000	83.34	20.32	56.36	
DC8038S12L	S	12	7.0~13.8	0.60	7.20	5000	67.62	13.47	51.23	
DC8038B12H	B	12	7.0~13.8	1.60	19.20	7000	98.45	26.56	61.25	
DC8038B12M	B	12	7.0~13.8	0.90	10.80	6000	83.34	20.32	56.36	
DC8038B12L	B	12	7.0~13.8	0.60	7.20	5000	67.62	13.47	51.23	
DC8038S24H	S	24	14.0~27.6	0.80	19.20	7000	98.45	26.56	61.25	
DC8038S24M	S	24	14.0~27.6	0.50	12.00	6000	83.34	20.32	56.36	
DC8038S24L	S	24	14.0~27.6	0.30	7.20	5000	67.62	13.47	51.23	
DC8038B24H	B	24	14.0~27.6	0.80	19.20	7000	98.45	26.56	61.25	
DC8038B24M	B	24	14.0~27.6	0.50	12.00	6000	83.34	20.32	56.36	
DC8038B24L	B	24	14.0~27.6	0.30	7.20	5000	67.62	13.47	51.23	

Notes: Specifications subject to change without notice!



SPECIFICATIONS:92x92x25mm FAN

Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC9225S12H	S	12	7.0~13.8	0.25	3.00	3000	46.87	3.25	33.25	78
DC9225S12M	S	12	7.0~13.8	0.20	2.40	2500	38.26	2.15	29.64	
DC9225S12L	S	12	7.0~13.8	0.16	1.92	2000	30.95	1.76	26.76	
DC9225B12H	B	12	7.0~13.8	0.25	3.00	3000	46.87	3.25	33.25	
DC9225B12M	B	12	7.0~13.8	0.20	2.40	2500	38.26	2.15	29.64	
DC9225B12L	B	12	7.0~13.8	0.16	1.92	2000	30.95	1.76	26.76	
DC9225S24H	S	24	14.0~27.6	0.20	3.00	3000	46.87	3.25	33.25	
DC9225S24M	S	24	14.0~27.6	0.12	2.40	2500	38.26	2.15	29.64	
DC9225S24L	S	24	14.0~27.6	0.08	1.92	2000	30.95	1.76	26.76	
DC9225B24H	B	24	14.0~27.6	0.20	3.00	3000	46.87	3.25	33.25	
DC9225B24M	B	24	14.0~27.6	0.12	2.40	2500	38.26	2.15	29.64	
DC9225B24L	B	24	14.0~27.6	0.08	1.92	2000	30.95	1.76	26.76	

Notes: Specificatiions subject to change without notice!



Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC9238S12H	S	12	7.0~13.8	1.80	21.60	5500	124.56	19.36	57.23	160
DC9238S12M	S	12	7.0~13.8	1.20	14.40	5000	115.16	17.87	52.17	
DC9238S12L	S	12	7.0~13.8	0.90	10.80	4500	102.73	14.25	46.86	
DC9238B12H	B	12	7.0~13.8	1.80	21.60	5500	124.56	19.36	57.23	
DC9238B12M	B	12	7.0~13.8	1.20	14.40	5000	115.16	17.87	52.17	
DC9238B12L	B	12	7.0~13.8	0.90	10.80	4500	102.73	14.25	46.86	
DC9238S24H	S	24	14.0~27.6	1.00	24.00	5500	124.56	19.36	57.23	
DC9238S24M	S	24	14.0~27.6	0.80	19.20	5000	115.16	17.87	52.17	
DC9238S24L	S	24	14.0~27.6	0.60	14.40	4500	102.73	14.25	46.86	
DC9238B24H	B	24	14.0~27.6	1.00	24.00	5500	124.56	19.36	57.23	
DC9238B24M	B	24	14.0~27.6	0.80	19.20	5000	115.16	17.87	52.17	
DC9238B24L	B	24	14.0~27.6	0.60	14.40	4500	102.73	14.25	46.86	
Notes: Specificatiions subject to change without notice!										



SPECIFICATIONS:120x120x25mm FAN

Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC1225S12H	S	12	7.0~13.8	0.40	4.80	2400	79.75	2.62	32.56	140
DC1225S12M	S	12	7.0~13.8	0.27	3.24	2000	66.15	2.06	28.47	
DC1225S12L	S	12	7.0~13.8	0.19	2.28	1700	52.56	1.38	24.53	
DC1225B12H	B	12	7.0~13.8	0.40	4.80	2400	79.75	2.62	32.56	
DC1225B12M	B	12	7.0~13.8	0.27	3.24	2000	66.15	2.06	28.47	
DC1225B12L	B	12	7.0~13.8	0.19	2.28	1700	52.56	1.38	24.53	
DC1225S24H	S	24	14.0~27.6	0.20	4.80	2400	79.75	2.62	32.56	
DC1225S24M	S	24	14.0~27.6	0.18	4.32	2000	66.15	2.06	28.47	
DC1225S24L	S	24	14.0~27.6	0.14	3.36	1700	52.56	1.38	24.53	
DC1225B24H	B	24	14.0~27.6	0.20	4.80	2400	79.75	2.62	32.56	
DC1225B24M	B	24	14.0~27.6	0.18	4.32	2000	66.15	2.06	28.47	
DC1225B24L	B	24	14.0~27.6	0.14	3.36	1700	52.56	1.38	24.53	

Notes: Specificatiions subject to change without notice!



SPECIFICATIONS:120x120x38mm FAN

Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC1238S12H	S	12	7.0~13.8	0.55	6.60	2800	110.36	7.65	41.23	265
DC1238S12M	S	12	7.0~13.8	0.40	4.80	2500	98.78	5.65	37.65	
DC1238S12L	S	12	7.0~13.8	0.25	3.00	2200	83.47	3.48	33.47	
DC1238B12H	B	12	7.0~13.8	0.55	6.60	2800	110.36	7.65	41.23	
DC1238B12M	B	12	7.0~13.8	0.40	4.80	2500	98.78	5.65	37.65	
DC1238B12L	B	12	7.0~13.8	0.25	3.00	2200	83.47	3.48	33.47	
DC1238S24H	S	24	14.0~27.6	0.35	8.40	2800	110.36	7.65	41.23	
DC1238S24M	S	24	14.0~27.6	0.22	5.28	2500	98.78	5.65	37.65	
DC1238S24L	S	24	14.0~27.6	0.15	3.60	2200	83.47	3.48	33.47	
DC1225B24H	B	24	14.0~27.6	0.35	8.40	2800	110.36	7.65	41.23	
DC1225B24M	B	24	14.0~27.6	0.22	5.28	2500	98.78	5.65	37.65	
DC1225B24L	B	24	14.0~27.6	0.15	3.60	2200	83.47	3.48	33.47	

Notes: Specificatiions subject to change without notice!



SPECIFICATIONS:25x25x10mm FAN

Model No.	Bearing Type Ball & Sleeve	Rated Voltage	Operation Voltage	Rated Current	Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
	(B/S)	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)	(g)
DC2510S05H	S	5	3.5~5.5	0.20	1.00	13000	2.95	6.98	30.56	6.5
DC2510S05M	S	5	3.5~5.5	0.16	0.80	10000	2.25	5.12	24.15	
DC2510S05L	S	5	3.5~5.5	0.14	0.70	8000	1.65	2.54	19.35	
DC2510B05H	B	5	3.5~5.5	0.20	1.00	13000	2.95	6.98	30.56	
DC2510B05M	B	5	3.5~5.5	0.16	0.80	10000	2.25	5.12	24.15	
DC2510B05L	B	5	3.5~5.5	0.14	0.70	8000	1.65	2.54	19.35	
DC2510S12H	S	12	7.0~13.8	0.12	1.44	13000	2.95	6.98	30.56	
DC2510S12M	S	12	7.0~13.8	0.10	1.20	10000	2.25	5.12	24.15	
DC2510S12L	S	12	7.0~13.8	0.08	0.96	8000	1.65	2.54	19.35	
DC2510B12H	B	12	7.0~13.8	0.12	1.44	13000	2.95	6.98	30.56	
DC2510B12M	B	12	7.0~13.8	0.10	1.20	10000	2.25	5.12	24.15	
DC2510B12L	B	12	7.0~13.8	0.08	0.96	8000	1.65	2.54	19.35	

Notes: Specifications subject to change without notice!